


Classia

Shutter switch

RW4037 - RA4037 - RG4037
RW4027 - RA4027 - RG4027
RW4028H - RA4028H- RG4028H


..4037


..4027


..4028H

Use

Shutter control device for lighting and other loads.


Range

Designation	Item
Shutter switches double 1P (NO) + 1P (NO)	☐ RW4037 ▒ RA4037 ■ RG4037
Shutter switches Changeover switch 1P	☐ RW4027 ▒ RA4027 ■ RG4027
Double-key changeover switch 1-0-2 with interlock	☐ RW4028H ▒ RA4028H ■ RG4028H

Color code:

☐ **White** colour ▒ **Aluminum** colour ■ **Black** colour

Overall dimensions (mm)

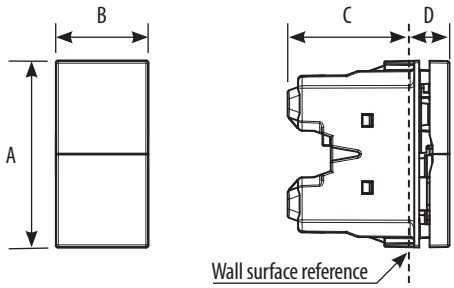

	A	B	C	D
..4037	45.1	22.3	29.3	9.8
..4027	45.1	22.3	33.8	9.8
..4028H	45.1	22.3	33.8	9.8

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 2,5 mm^2 max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- Protection index
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40

- Mechanical characteristics
Impact test: IK 04

- Material characteristics
Case: PC (Polycarbonate)
Key cover: ABS – ABS/PC

Halogen free.

UV resistant.

Self-extinguishing:
850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

- Electrical characteristics
Voltage: 250 V a.c.
Current: 10 A

- Climatic characteristics
Storage temperature: - 10° C to + 70° C
Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.
Refer to e.catalogue.